



NO: RD-HA-SD050
 DATE: 2005/09/15 I(REV:A1)


10/100 BASE-T SMT TRANSFORMER

MODEL NO:HA-050

FEATURE:


- RoHS Compliant
- RoHS peak solder rating 260
- Designed to meet IR requirement
- Specifications @ 25
- Operating temp. : -40 ~ +85
- OCL : 350uH Min @100Khz , 100mV 8mA

SCHEMATICS:

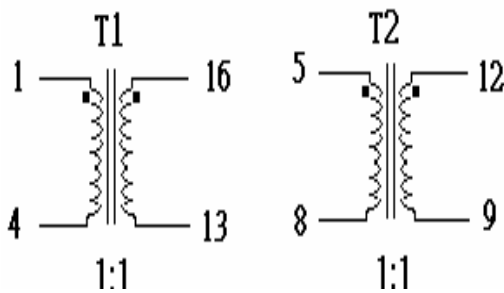


DIMENSION: mm

TOLERANCE: ±0.25

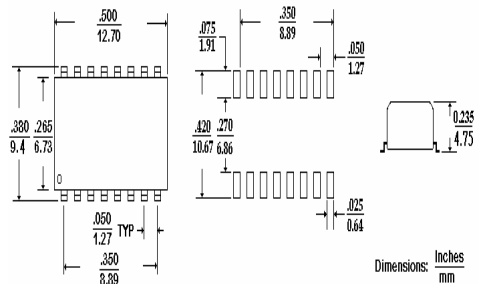


Packing :

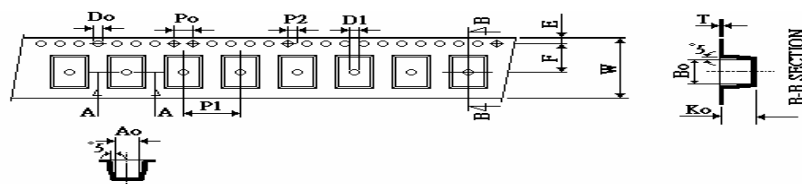

A-A SECTION		DIMENSION	W	P1	PO	E	F	AO	BO	Aot
SPEC.		24.0	16.0	4.0	1.75	11.5	10.0	13.2	0.08	(MIN)
	+/-	0.30	0.10	0.10	0.10	0.10	0.10	0.10		
B-B SECTION		DIMENSION	KO	P2	Do	D1	10Po	T	K1	Bot
SPEC.		6.80	2.0	1.55	1.5	40.0	0.40	6.15	0.08	(MIN)
	+/-	0.10	0.10	0.05	(MIN)	0.20	0.10	0.10		

Tape & reel.....600/reel
 Tube.....39/tab

MODEL NO:HA-050 Profile of IR Reflow (Lead Free)

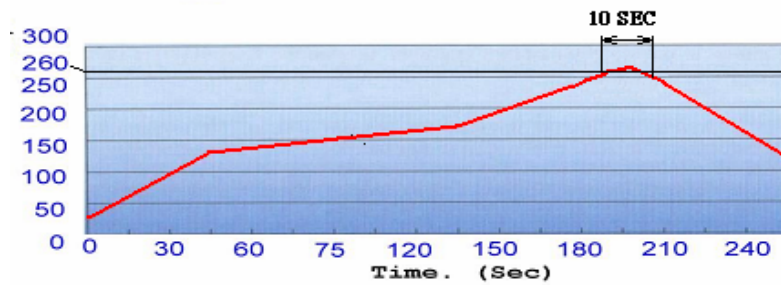

PACKING

1. Tape & Reel : 600pcs / Reel , 3000pcs / Carton
2. Dry Pack : 1pcs
Product Description:(5g Silica Gel Desiccant)
PH: 4-8
Package Materials: Paper(Length 6.5±1cm , Width 5±1cm)
3. Reel Packed By Vacuum
4. Seal Per Jedec

