

10/100 BASE-T SMT TRANSFORMER MODEL NO : HA-069

FEATURE:

RoHS Compliant

RoHS peak solder rating 260

Designed to meet IR requirement


Specifications @ 25

Operating temp. : -40 ~ +85

OCL : 350uH MIN. @100KHz 100mV 8mA VDC


Part Number	Insertion Loss (dB Max.) MHz	Cross talk (dB Min.) MHz		Return Loss (dB Min.) MHz		Common Mode Rejection (dB MIN) MHz		Hi pot VAC
HA-069	0.1~125	1~60	60~100	1~60	60~100	1~60	60~100	
	-1.0	-40	-38	-15	-14	-35	-32	1500

SCHEMATICS:

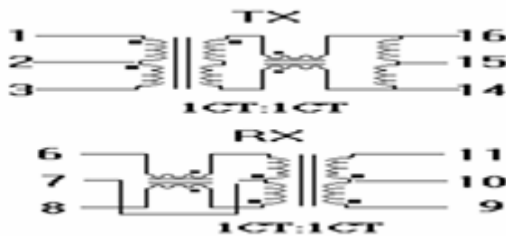


DIMENSION: mm

TOLERANCE:±0.25

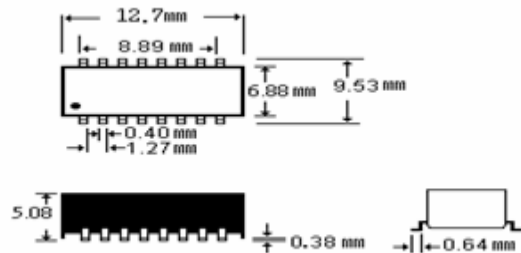

Packing :

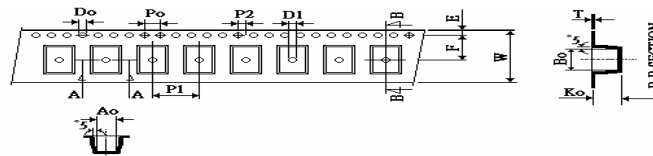


A-A SECTION								
DIMENSION	W	P1	PO	E	F	AO	BO	Aot
SPEC.	24.0	16.0	4.0	1.75	11.5	10.0	13.2	0.08
	+/- 0.30	0.10	0.10	0.10	0.10	0.10	0.10	(MIN)
DIMENSION	KO	P2	Do	D1	10Po	T	K1	Bot
SPEC.	6.80	2.0	1.55	1.5	40.0	0.40	6.15	0.08
	+/- 0.10	0.10	0.05	(MIN)	0.20	0.10	0.10	(MIN)

Tape & reel.....600/reel
Tube.....39/Tub

MODEL NO : HA-069

Profile of IR Reflow (Lead Free)

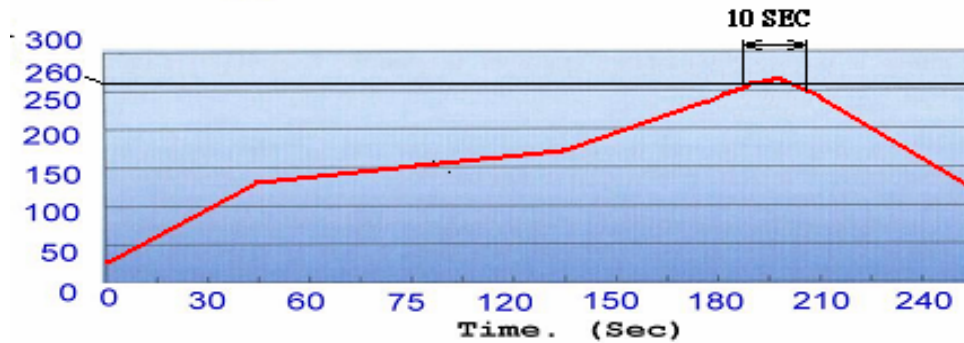

PACKING

1. Tape & Reel : 600pcs / Reel , 3000pcs / Carton
2. Dry Pack : 1pcs
Product Description:(5g Silica Gel Desiccant)
PH: 4-8
Package Materials: Paper(Length 6.5±1cm , Width 5±1cm)
3. Reel Packed By Vacuum
4. Seal Per Jedec

