



NO:RD-HALO-TG110-S025NX  
Date:2005/09/15-I (REV:A1)

## Dual Port SMD 10/100 Isolation Modules MODEL NO.: HK-035

### FEATURE:

RoHS Compliant

RoHS peak solder rating 260°C


DESIGNED TO MEET IR REQUIREMENT

SPECIFICATIONS:AT 25°C


Part Number	Cross Talk	OCL (uh min/ KHz MIN)	CMR	CWW (pF /KHz MAX)	DCR Ω(MAX)	HIPOT (VAC)
HK-035	0.1~100MHz -40dB TYP	350UH MIN	0.1~100MH Z	20PF TYP	0.9ΩMAX	1500

### SCHEMATICS:

**DIMENSION: mm**  
TOLERANCE:±0.25(0.010)

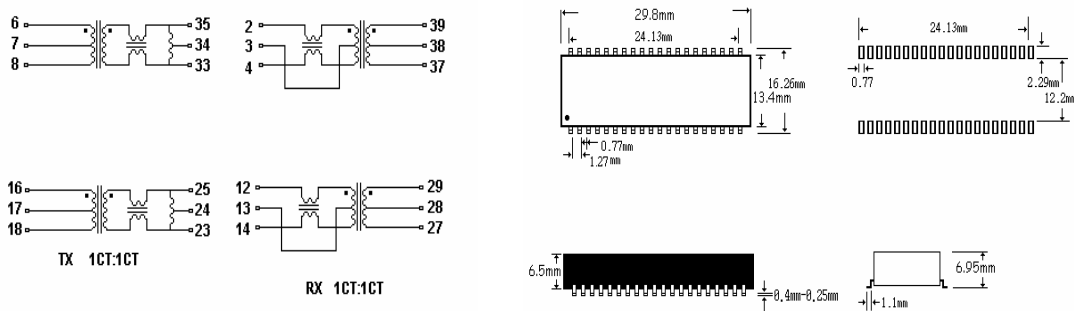

### Packing :

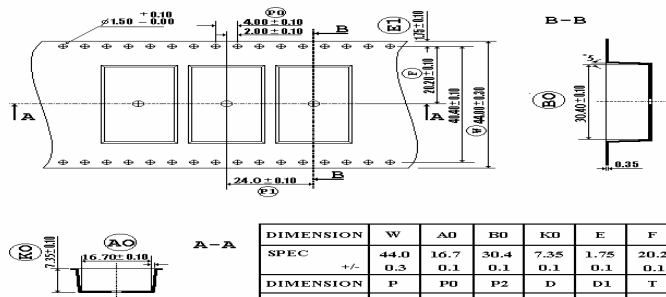

DIMENSION	W	A0	B0	K0	E	F
SPEC	44.0	16.7	30.4	7.35	1.75	20.2
	+/- 0.3	0.1	0.1	0.1	0.1	0.1
DIMENSION	P	P0	P2	D	D1	T
SPEC	24.0	4.0	2.0	1.5	2.0	0.35
	+/- 0.1	0.1	0.1	(MIN)	(MIN)	0.05


Tape & reel-----350/reel  
Tube-----16/tube



NO:RD-HALO-TG110-S025NX  
Date:2005/09/15-I (REV:A1)

## MODEL NO.: HK-035

### Profile of IR Reflow (Lead Free)

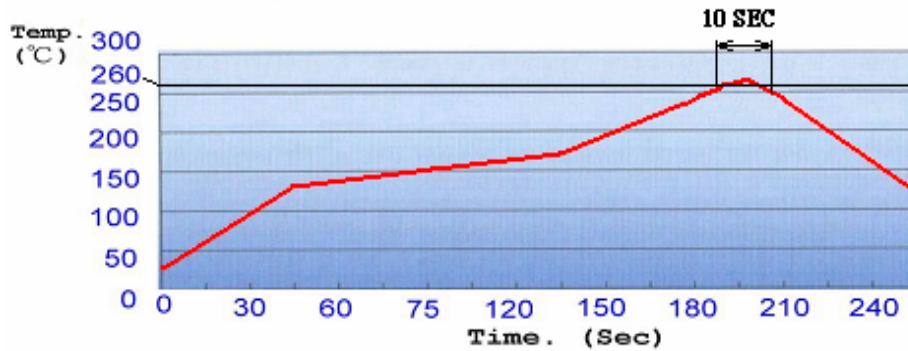

### PACKING

1. Tape & Reel : 350pcs / Reel , 1750pcs / Carton
2. Dry Pack : 1pcs  
Product Description:(5g Silica Gel Desiccant)  
PH: 4-8  
Package Materials: Paper(Length 6.5±1cm , Width 5±1cm)
3. Reel Packed By Vacuum
4. Seal Per Jedec

