



Number:RD-Pulse HX1204
DATA:2005/09/15-I(REV:A1)

10/100BASE-TX TRANSFORMER MODULES

MODEL NO.: HK-061

FEATURE:

RoHS Compliant

RoHS peak solder rating 260°C


SPECIFICATIONS:AT 25°C

Operating Temperature range:-40°C to +85°C

OCL(SEC): 550uH min ,with 8mA bias @-40°C and +85°C with 8mA bias 350uH min


Parts Number	Insertion Loss (dB TYP)				Return Loss (dB MIN) MHz					Cross talk (dB TYP)				Differential to Common Mode Rejection (dB MIN)				HIPOT 1800 (VRMS).
	0.1	30~60	100	120	5~30	40	50	60	80	1	30	60	100	30	60	100	200	
HK-061	-1.2	1.0	-1.2	-3.0	-16	-14.4	-13.1	-12.0	-10.0	-50	-43	-37	-33	-42	-37	-33	-25	

SCHEMATICS:

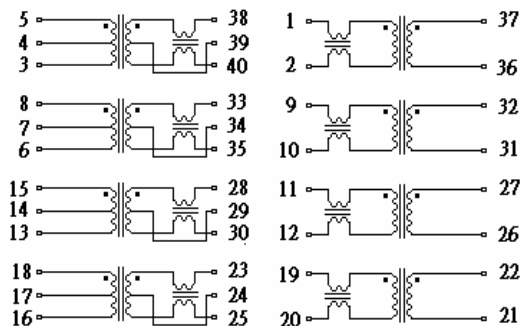


DIMENSION: mm


TOLERANCE: ±0.25

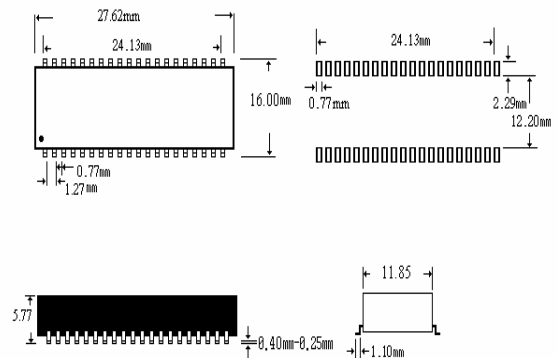

Packing :

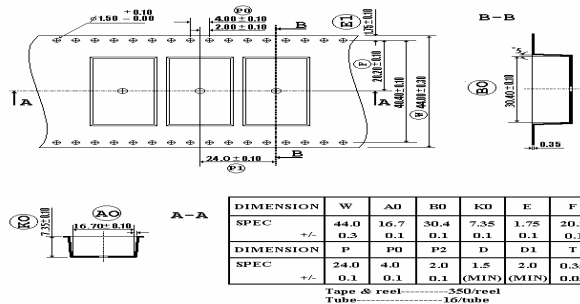

MODEL NO.: HK-061 Profile of IR Reflow (Lead Free)

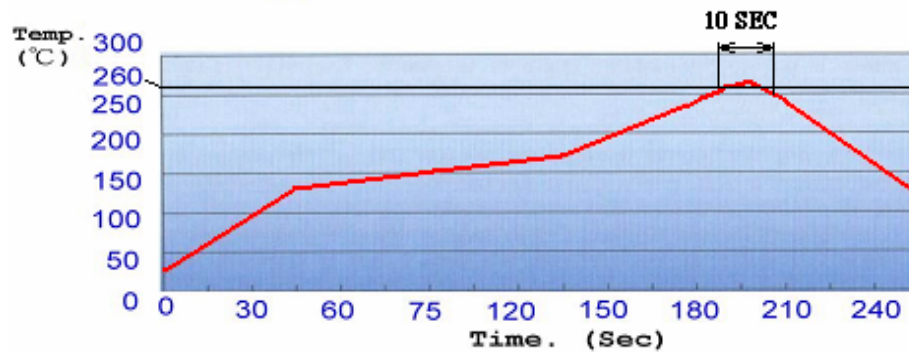

PACKING

1. Tape & Reel : 350pcs / Reel , 1750pcs / Carton
2. Dry Pack : 1pcs
Product Description:(5g Silica Gel Desiccant)
PH: 4-8
Package Materials: Paper(Length 6.5±1cm , Width 5±1cm)
3. Reel Packed By Vacuum
4. Seal Per Jedec

